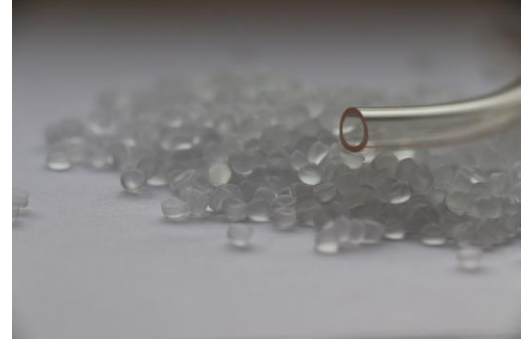


**KPH 82-121 (129AT5,129BT5,129BT6, 129BT7)****Application:** Transparent hose**Description:** This compound is based on the most transparent stabilizer and high-quality plasticizers. Final product has glossy, shimmering surface.**129AT5** is approximately odorless and based on highly effective lubricant.**Packaging:** 25 kg laminated polypropylene bags**Storage:** dry place, away from the sun, temperature below 30°C**Color:** Transparent (These grades can have blue and white undertones)

Properties	Unit	Amount	Standard
Density	gr/cm^3	1.21±0.01	ASTM D 792
Hardness at 15 second	Shore "A"	82±2	ASTM D 2240
Thermal stability at 200°C	Minute	70±5	VDE 0472
Mechanical properties Tensile Elongation	MPa %	18±1 Min 210	ASTM D 638

Temperature profile:

The recommended temperature settings for the extruder with L/D around 22-24 are as follows :

	Zone 1	Zone 2	Zone 3	Zone 4	Head	Die
Temp (°C)	145±5	150±5	155±5	160±5	155±5	165±5

Head Office: 5th floor, Number 51, 6th Golestan street, Pasdaran Avenue, Tehran, Iran. Tel : (+98 21)79453000, Fax: (+98 21)88762819info@khorramco.com website:www.khorramco.com

Approved by : QC & Laboratory Manager